

# Dustproof/Waterproof Light Fitting with Diffuser for LED Retrofit-Lamps
# Series 161/162... RLED OV
# 163/164... RLED OV


**Application:**
In humid, wet and dusty indoor areas of industrial premises, for workshops and car parks, basements etc.


**Design:**
**Without ballast.**
Housing: Glass fibre reinforced polyester, foamed gasket.
Diffuser: Injected, clear acrylic glass with internal prisms. (161/162) or stippled clear (163/164).
Closure: Three-part captive plastic clips
Reflector: Sheet Steel, detachable.

Connection: 3-pole terminal block. With built-in fuse for switch-off in case of Lamp fail.
Cable entries: 2 plugs M20.
Mounting: Closed knock-outs for direct ceiling mounting (to be opened at site). Sealing and pressure disks inside each fitting.

**Options:**
– through-wiring (**DV**)
– cable looping at 1 small side
– cover (**F**), frosted
– cover made of polycarbonate (**PC**)
– stainless steel clips (**KE**)

**Note:**
Not suitable for retrofit lamps that are designed for use in ECG luminaires. Operate IEC 62776 certified lamps only that are released by the manufacturer to operate at mains voltage.

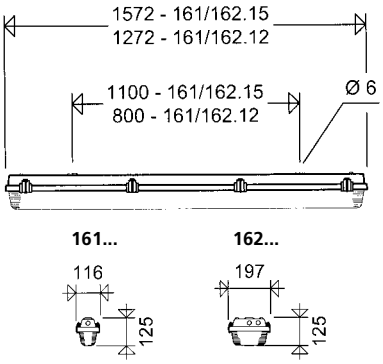

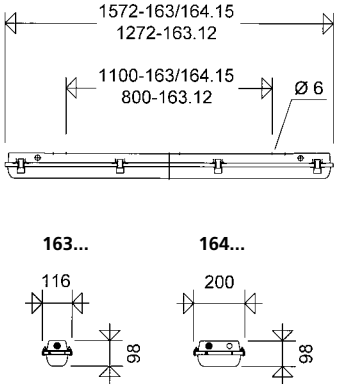
| Article no. | Type | Lamps | Length [m] | Weight [kg] without packaging material |
|---|---|---|---|---|
| **161/162... RLED OV** | | | | |
| 16117 0106 | **161 1/12 RLED OV** | 1 x LED-Retrofit | 1,2 | 3,9 |
| 16117 0107 | **161 1/15 RLED OV** | 1 x LED-Retrofit | 1,5 | 3,0 |
| 16215 0106 | **162 2/12 RLED OV** | 2 x LED-Retrofit | 1,2 | 3,9 |
| 16215 0107 | **162 2/15 RLED OV** | 2 x LED-Retrofit | 1,5 | 4,7 |
| **163/164... RLED OV** | | | | |
| 16302 0208 | **163 1/12 RLED OV** | 1 x LED-Retrofit | 1,2 | 1,8 |
| 16302 0209 | **163 1/15 RLED OV** | 1 x LED-Retrofit | 1,5 | 2,2 |
| 16415 0209 | **164 2/15 RLED OV** | 2 x LED-Retrofit | 1,5 | 3,5 |